



## DLC pro - handle exchange


1. Remove the side-panel of the DLC pro

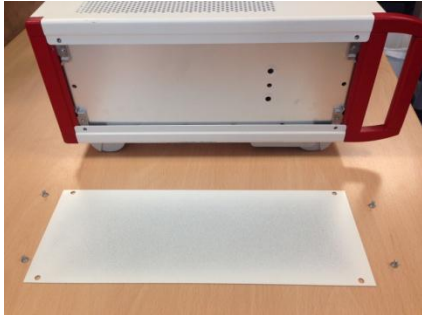

2. Remove the top and bottom plate (push in the direction indicated by the green arrows).  
Remove the handle (unscrew the screws marked with a red circle).

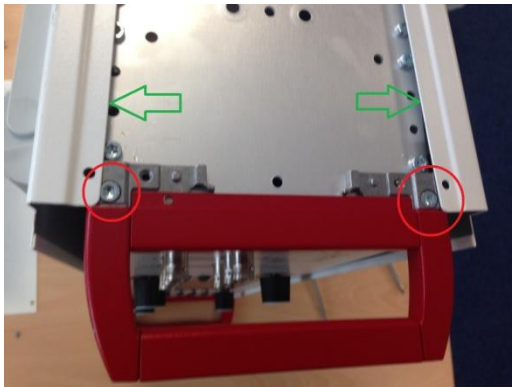

3. Remove the marked screw(s) (not all visible in photo), which are not necessary for the stability of the DLC pro's assembly.

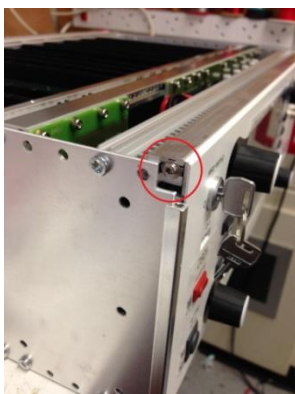

4. Reassemble the DLC pro